



Data sheet Polytronik® Toroidal transformer

Part no.:	RSO 825002
Description:	RKT 15VA/ 230V/ 2x12.0V 2x0.63A
Safety isolating transformer according to:	EN 61558-2-6 / VDE 0570
Power [VA]:	15
Input voltage [AC]:	230 V +-10%
Output voltage [AC]:	2 x 12.00 V
Output current [AC]:	2 x 0.63 A
Frequency [Hz]:	50/60
Dielectric strength PRI - SEC [AC]:	4400 V
Efficiency [%]:	86
Power loss at no-load [W]:	0.3
Maximum ambient temperature t_a [°C]:	60
Temperature class:	B (130°C)
Temperature switch:	120°C (automatically resetting)

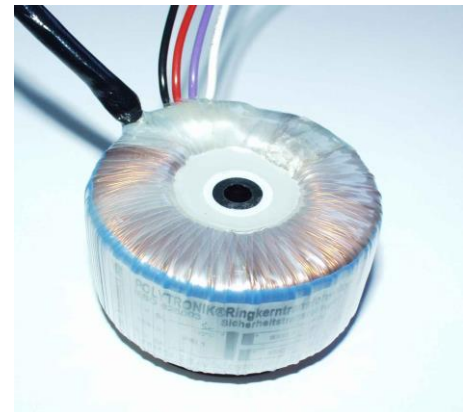

construction only

Schematic:

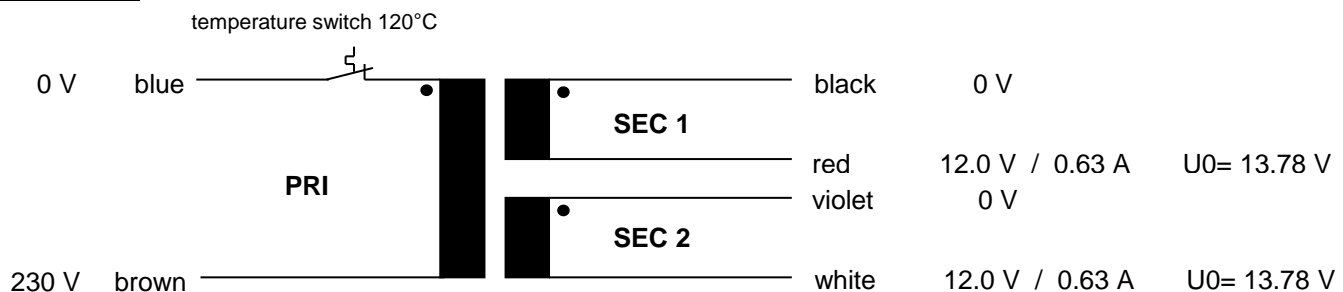

possible interconnection: parallel connection **12.0V / 1.25A** = connect black with violet and red with white
 series connection **24.0V / 0.63A** = connect red with violet

Approval marks:	CE; ENEC; UL508 (E182061)	
Connections:	primary and secondary strands 200mm long, ends assembled with ferrules	
Model:	toroidal transformer pottet on mounting disc with through-hole 5.5 mm	
Appliance class:	prepared for class II	
Protection class:	IP 00	
Recommended fuse ratings:	primary	0.125 AT (IEC60127-2-5)
	secondary 1	0.630 AT (IEC60127-2-3)
	secondary 2	0.630 AT (IEC60127-2-3)
Dimensions:	diameter approx. =	60 mm
	height approx. =	39 mm
Weight:	approx. 0.40 kg	